



Linear-ICE Linear LED Pendant
pendant




Linear LED translucent Pendant
LINEAR-ICE-LED

Design: Pendant luminaire for direct-indirect light distribution, with luminaire head in satinised acrylic. Translucent, UV-stabilised, Cover panel transparent at the top.
Separate canopy to accommodate the electrical components.
Dali dimmable power supply remote and housed in the ceiling.

Mounting: Pendant mounting. Stepless height adjustable wire suspension for max. 5m drop height (2 toolless adjustable automatic wire clamps and 2 Y-shaped steel wires). Visible metal parts bright galvanised. Transparent connecting cables from canopy to luminaire.

Lamps	Power supply	Product code	
LED	Dali	LINEAR-ICE-LED	
Luminaire Luminous Flux (Lm)	Luminaire output (W)	Luminaire efficiency (Wlm / °)	Luminous colour
Cir.2780 Lm	Cir.19w	-	4000K

L	W	H
1659 mm	66 mm	61 mm

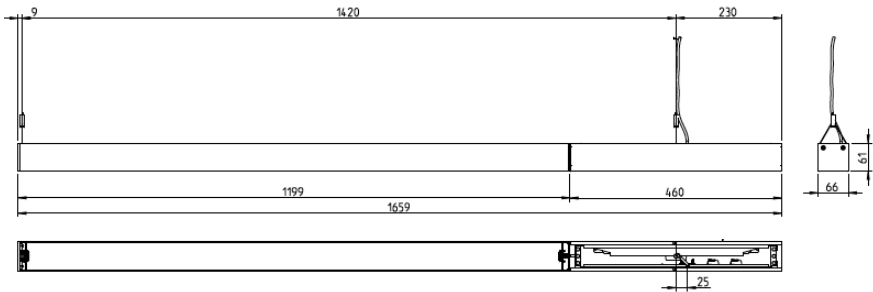

Dimensions (mm)	Weight (kg)
1659 x 66 x 61	3.68kg