






Blade LED light 1500mm XBTKL

Blade XBTKL

LED luminaire for continuous mounting when utilising additional kit. Direct lighting distribution only. Specials available with Indirect LED on request. Housing nom. Length 1500mm. Manufactured from sheet steel with a choice of opal, satin diffuser panel (OS-X) or micro-prismatic panel (MPS). Finish in RAL colour White (similar to 9003). Special RAL colours available on request. Complete with integral DALI dimmable driver (DA), or non-dimmable driver (ND). LED Luminous Flux, in HO high output: 5000 lumens (initial) or HE high efficiency: 3700 lumens (Initial). The luminous densities of different lengths are almost identical, allowing lengths to be combined to form an optimum luminaire arrangement. LED colour rendering CRI >80, colour temperature 4000 Kelvin (840) or 3000 Kelvin (830); Colour Tolerance: 3 Step MacAdam ellipse. Integral emergency & inbuilt sensors are available on request.

Mounting instructions: Pendant mounting. Complete with adjustable height, twin steel wire suspension kit, 1.5m max. length. Top barrel screws to ceiling. The free end of the steel cable pushes into a clutch mounted on the luminaire.

	LED Luminous Flux	LED Power	Luminaire Power	Luminaire Luminous Flux Opal	Luminaire Luminous Flux MPS
HO	5000 lm	32W	37W	2947 lm	3055 lmw
HE	3700lm	23W	26.5W	2181 lm	2261 lm

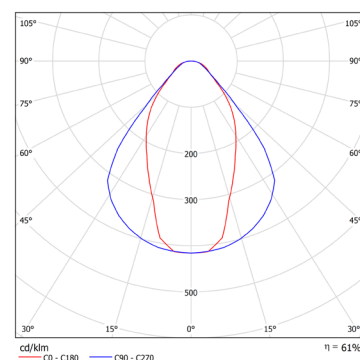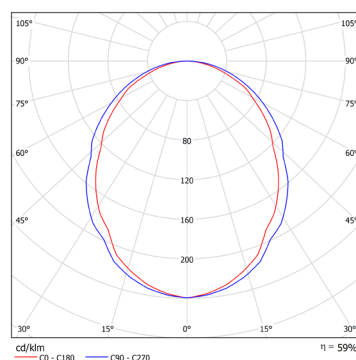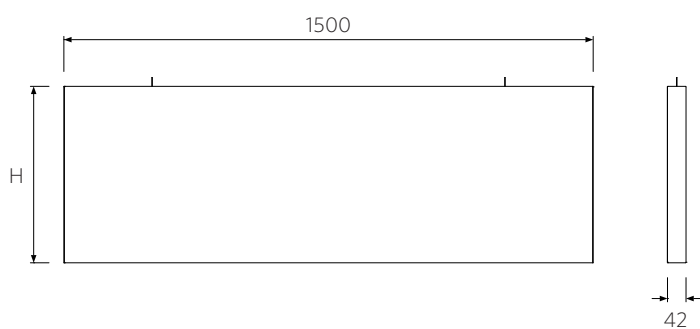

Range Code	Length (mm) /10	(H)eight (mm) /10	Lum. Flux /10	LED Colour	Optic	Driver Control	Emergency if required	Example product code
XBTKP	150	15	500	840	MPS	ND	/ED3	XBTKL 150x30/500-840 OSX-DA
		20	370	830	OSX	DA	/EMST	
		30					/EMDA	
		40						
		50						
		60						