





Blade LED light 900mm XBTKP

Blade XBTKP


LED luminaire for standalone mounting supplied as a single unit. Direct lighting distribution only. Specials available with Indirect LED on request. Housing nom. Length 900mm. Manufactured from sheet steel with a choice of opal, satin diffuser panel (OS-X) or micro-prismatic panel (MPS). Finish in RAL colour White (similar to 9003). Special RAL colours available on request. Complete with integral DALI dimmable driver (DA), or non-dimmable driver (ND). LED Luminous Flux, in HO high output: 3000 lumens (initial) or HE high efficiency: 2200 lumens (Initial). The luminous densities of different lengths are almost identical, allowing lengths to be combined to form an optimum luminaire arrangement. LED colour rendering CRI >80, colour temperature 4000 Kelvin (840) or 3000 Kelvin (830); Colour Tolerance: 3 Step MacAdam ellipse. Integral emergency & inbuilt sensors are available on request.

Mounting instructions: Pendant mounting. Complete with adjustable height, twin steel wire suspension kit, 1.5m max. length. Top barrel screws to ceiling. The free end of the steel cable pushes into a clutch mounted on the luminaire.

	LED Luminous Flux	LED Power	Luminaire Power	Luminaire Luminous Flux Opal	Luminaire Luminous Flux MPS
HO	3000 lm	19W	22W	1768 lm	1833 lmw
HE	2200lm	14W	16W	1297 lm	1344 lm

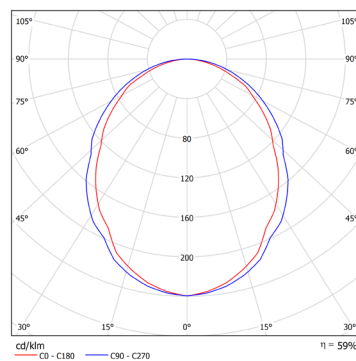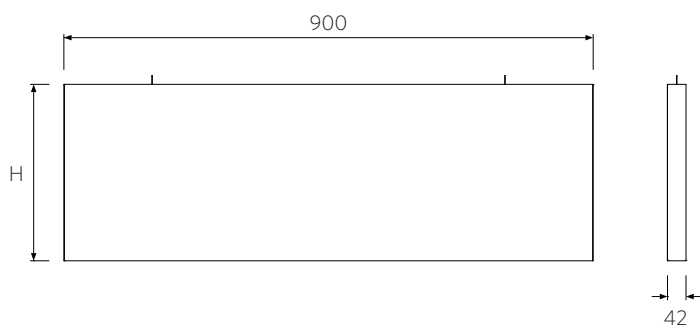

Opal distribution

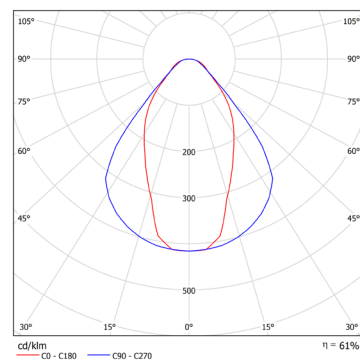

MPS distribution

Range Code	Length (mm) /10	(H)eight (mm) /10	Lum. Flux /10	LED Colour	Optic	Driver Control	Emergency if required	Example product code
XBTKP	090	15	300	840	MPS	ND	/ED3	XBTKP 090x30/300-840 OSX-DA
		20	220	830	OSX	DA	/EMST	
		30					/EMDA	
		40						
		50						
		60						