



IRIS-L-P LED Pendant Pendant 600mm diameter 12000Lm

LED translucent Pendant IRIS-L-P-12000-840 DA


Design: The IRIS-LED is made of highly transparent plastic. Three specially developed LED ring segment modules for the direct and indirect lighting component, fitted with mid-power LEDs and closed by a highly transparent plastic lens with microprism structure create a unique lighting effect reticent of the human iris. Available light colours are 830 (3000 K) and 840 (4000 K).. The patented pendant solution featuring a three-way split power supply integrated in the pendant cables lends the perfect embodiment to this ring-shaped luminaire. The filigree pendant fixture retreats into the background, leaving only the transparent luminaire body on view. Optical accentuation possible by inserting a separately available colour inlay film for the side edge. The IRIS-P-LED pendant-mounted luminaire is DALI dimmable.

Lamps	Power supply	Product code
LED	Integral DALI	IRIS-L-P-120000-840 DA

Luminaire Luminous Flux (Lm) Initial	Luminaire output (W)	Luminaire efficiency (LOR)	Luminous colour
12000Lm	83w	84.3%	4000K

Luminaire Luminous Flux (Lm) Exit	Light distribution Direct / indirect
10100Lm	44 / 56

L	B	H
600 mm	100mm	50 mm

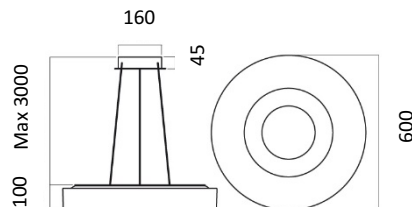

Dimensions (mm)	Weight (kg)
600 x 100 x 100	6.8kg