



Plafou LED Pendelleuchte

PLAFOU-P 5900/840 SI-MPL DA

Sturdy rectangular luminaire housing made of an edged highly transparent PMMA longitudinal microprism panel. End caps in plastic. Gear tray positioned centrally in the housing featuring multiple profiles in silver (SI) or white (WS) powder coated silver. LED board modules arranged on the gear tray. Electrical components accommodated on the top of the luminaire are covered by a steel housing. Optical control and glare reduction provided by the longitudinal microprisms. Top of the luminaire with recesses for subtle indirect lighting component. Recesses with covered by transparent acrylic glass as an insect guard. Pendant mounting of the luminaire on a steel wire with ceiling fixture and transparent connecting mains cable with rectangular ceiling junction box. Stepless adjustment of the steel wire pendant height at the luminaire. Steel powder coated junction box. Prefitted electronic LED converter. Pendant luminaire with heat-resistant wiring. Protection rating IP20, Safety class I.



Colour:

Luminaire housing - transparent;

Ceiling box - similar to RAL 9016 white silk matt

Lamps	Ballast	Prod. code
9xLED-M 4 W	LED Driver DALI	SPA0000009

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
5155	43	119

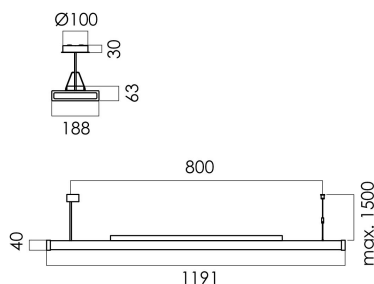

Dimens. [mm]			Weight [kg]	Photometric data		
L	B	H		Longitudinal UGR	Transverse UGR	LOR
1191	188	63	4,7	19.5	18.2	87.37 %

Plafou LED Pendelleuchte

