



Pergament Square LED recessed ceiling luminaire large

Design

C. Meyer, M. Kocks, P. H. Neuhorst

PERGA-QE 455/2600/840 WS

Square luminaire element comprising an acrylic glass block with transparent superpolished exterior. Underneath painted matt to reduce glare. Luminaire element integrated in a square powder coated steel frame designed for snap fixture into the recessed powder-coated steel ceiling housing. Recessed housing includes clamps with adjustable clamping thickness from 38 to 69 mm for fixture in the ceiling cut-out. Recessed ceiling housing accommodates the electrical components and electronic ballast. The LED module is formed as a square LED flat board and can be removed for installation or exchange using a fold-out LED carrier. Plug-in electrical connection of the LED flat board. Luminaire with heat-resistant wiring. Homogenous illumination of the light surface. Suitable for ceiling or wall mounting. Light colours 830 or 840. Also in a dimmable version.

Protection rating IP20, safety class I.



Colour:

Metal body – similar to RAL 9016 white silk matt

Frame – white (WS), silver (SI), black (AQ)

Lamps	Ballast	Colour	Prod. code
4xLED-M 4 W	LED Driver	Similar to RAL 9016 white silk matt	SPP0000016

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
1625	23	70

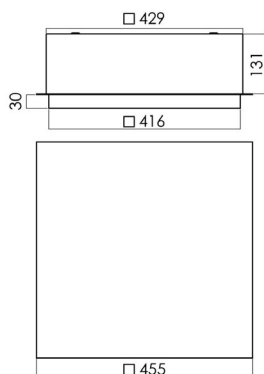

Dimens. [mm]						Weight [kg]	Photometric data		
455	455	162	131	435	435	15,1	Longitudinal UGR	Transverse UGR	LOR
455	455	162	131	435	435	15,1	18.7	18.4	62.5 %

Pergament Square LED recessed ceiling luminaire large

