

## Pergament Square LED Surface-mounted ceiling luminaire large

### Design

C. Meyer, M. Kocks, P. H. Neuhorst



### PERGA-QA 422/2600/840 AQ

Square luminaire element comprising an acrylic glass block with transparent superpolished exterior. Underneath painted matt to reduce glare. Luminaire element integrated in an outer steel powder-coated sectional aluminium square frame. The acrylic block is scratchproof and insensitive to fingerprints, and is connected to a powder-coated metal body by a bayonet and snap fastening. The metal body accommodates the electrical components and electronic ballast. The LED module is formed as a square LED flat board and can be removed for installation or exchange using a fold-out LED carrier. Plug-in electrical connection of the LED flat board. Luminaire with heat-resistant wiring. Homogenous illumination of the light surface. Suitable for ceiling or wall mounting. Light colours 830 or 840. Also in a dimmable version.

Protection rating IP20, safety class I.



Colour:

Metal body - similar to RAL 9016 white silk matt

Frame - white (WS), silver (SI), black (AQ)

Lamps	Ballast	Colour	Prod. code
4xLED-M 4 W	LED Driver	RAL 7021 black silk matt	SPP0000093

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
1500	23	65

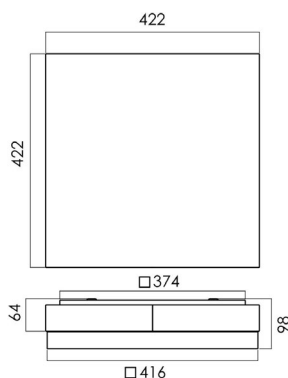

Dimens. [mm]			Weight [kg]	Photometric data		
422	422	98	11,0	Longitudinal UGR	Transverse UGR	LOR
422	422	98	11,0	18.3	18.0	62.5 %

## Pergament Square LED Surface-mounted ceiling luminaire large

