



Pergament Round LED surface-mounted ceiling luminaire small

Design

C. Meyer, M. Kocks, P. H. Neuhorst

PERGA-RA 310/1900/840 AQ

Round luminaire element comprising an acrylic glass block with transparent superpolished exterior. Underneath painted matt to reduce glare. Luminaire element integrated in an outer steel powder-coated sectional aluminium cylindrical frame. The acrylic block is scratchproof and insensitive to fingerprints, and is connected to a powder-coated metal body by a bayonet and snap fastening. The metal body accommodates the electrical components and electronic ballast. The LED module is formed as a round LED flat board and can be removed for installation or exchange using a key-hole screw connection. Electrical connection of the flat LED board by means of a plug. Luminaire with heat-resistant wiring. Homogenous illumination of the light surface. Suitable for ceiling or wall mounting. Light colours 830 or 840. Also in a dimmable version.



Protection rating IP20, safety class I.

Colour:

Metal body – similar to RAL 9016 white silk matt

Frame – white (WS), silver (SI), black (AQ)

Lamps	Ballast	Prod. code
1xLED-M 12W	LED Driver	SPP0000196
Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
1188	14	84

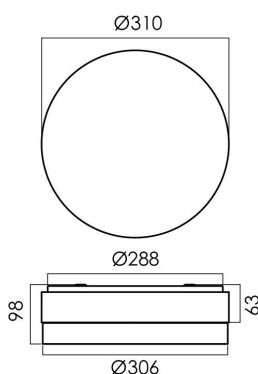

Dimens. [mm]	Weight [kg]	Photometric data
98	310	-
		Longitudinal UGR
		Transverse UGR
		LOR
		21.6
		21.5
		62.5 %

Pergament
Round LED surface-mounted ceiling
luminaire small

