



Norea Square surface-mounted ceiling luminaire large

Design
P. H. Neuhorst

NOREA-QA 625/414 OS-DALI

Square luminaire element comprising an acrylic glass panel with matt surface finish on both sides. Panel with an EV1 silver anodised extruded aluminium profile frame surround. Luminaire element suspended in the gear tray housing. Gear tray in steel, suitable for ceiling or wall mounting. Powder coated gear tray housing accommodates the electrical components and electronic ballast. Luminaire with heat-resistant wiring. Protection rating IP20, safety class I.



Colour:

Housing - similar to RAL 9016 white silk matt;

Frame - natural anodised

Lamps	Ballast	Socket	Prod. code	Ballast class EEI:
4xT16 14W	Dimm. electronic ballast	G5	SPT0000053	A1

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
2755	64	43

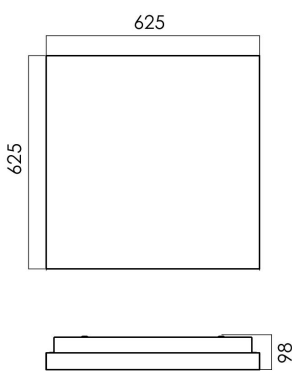

Dimens. [mm]			Weight [kg]	Photometric data		
				Longitudinal UGR	Transverse UGR	LOR
625	625	98	11,5	19.4	18.8	57.4 %

Norea
Square surface-mounted ceiling
luminaire large

