



Norea Square LED recessed ceiling luminaire small

NOREA-QE 345/2600/840 OS

Square luminaire element with an opal panel in a natural anodised aluminium profile frame surround. The luminaire is mounted using a fixing kit for fixture in the ceiling cut-out. The fixing kit is for different ceiling thicknesses. The profile frame is suspended in the powder-coated recessed ceiling housing using tension springs. The frame is removed using suction cups. The LED module is formed as a square LED flat board and screwed to the luminaire element. For connection of the luminaire this can be hinged down and fastened with screws at an oblong hole in the powder-coated metal body. The metal body accommodates the electrical components and electronic ballast. Luminaire with heat-resistant wiring. Homogenous illumination of the light surface. Also in a dimmable version.

Protection rating IP20, safety class I.



Colour:

Housing – similar to RAL 9016 White silk matt;

Frame – natural anodised

Lamps	Ballast	Prod. code
1xLED-M 15 W	LED Driver	SPT0000082

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
1581	21	75

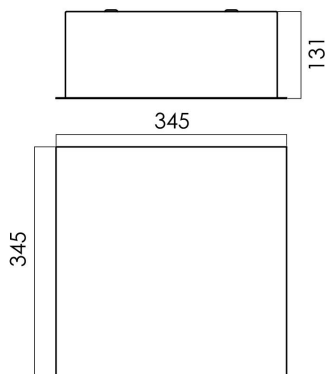

Dimens. [mm]			Weight [kg]	Photometric data		
				Longitudinal UGR	Transverse UGR	LOR
345	345	131	-	22.0	21.4	60.8 %

Norea
Square LED recessed ceiling luminaire
small

