



Norea Rectangular LED surface-mounted ceiling luminaire MPS large

Design
P. H. Neuhorst

NOREA-A 1545/11250/840 MPS-DA

Rectangular luminaire element with a microprism panel in a natural anodised aluminium profile frame surround. The frame can be removed using a bayonet fixture. The LED module is formed as a square LED flat board and screwed to the luminaire element. For connection of the luminaire this can be hinged down and fastened with screws at an oblong hole in the powder-coated metal body. The indirect component is ensured by recesses in the top of the metal body. The metal body accommodates the electrical components and electronic ballast. Luminaire with heat-resistant wiring. Variant suitable for office use with a microprism panel MPS. The LED points are visible as circles on the microprism panel. Suitable for ceiling or wall mounting. Also in a dimmable version. Protection rating IP20, safety class I.



Colour:

Housing – similar to RAL 9016 White silk matt;

Frame – natural anodised

Lamps	Ballast	Prod. code
3xLED-M 36W	LED Driver DALI	SPT0000090

Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
8235	126	65

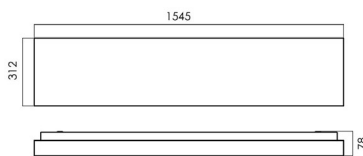

Dimens. [mm]			Weight [kg]	Photometric data		
1545	312	78		Longitudinal UGR	Transverse UGR	LOR
1545	312	78	-	18.4	17.7	73.2 %

Norea
Rectangular LED surface-mounted
ceiling luminaire MPS large

