



Norea Round LED surface-mounted ceiling luminaire MPS large

Design
P. H. Neuhorst

NOREA-RA 416/4300/840 MPS

Round luminaire element with a microprism panel in a natural anodised aluminium profile frame surround. The frame is fixed at the powder-coated metal body by a bayonet fixture with spring clip. The metal body accommodates the electrical components and electronic ballast. The LED module is formed as a round LED flat board and can be removed for mounting or exchange using a keyhole screw connection. Plug-in electrical connection of the LED flat board. Luminaire with heat-resistant wiring. Variant suitable for office use with a microprism panel MPS. The LED points are visible as circles on the microprism panel. Suitable for ceiling or wall mounting. Also in a dimmable version.



Protection rating IP20, safety class I

Colour:

Housing – similar to RAL 9016 White silk matt;

Frame – natural anodised

Lamps	Ballast	Prod. code
1xLED-M 27 W	LED Driver	SPT0000084
Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]
3162	31	102

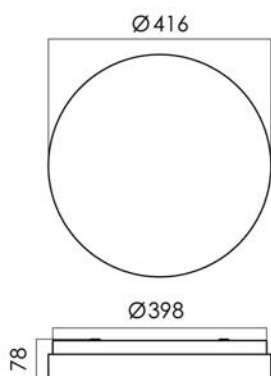

Dimens. [mm]			Weight [kg]	Photometric data		
L	B	H		Longitudinal UGR	Transverse UGR	LOR
416	416	78	4,5	19,8	19,3	62,0 %

Norea
Round LED surface-mounted ceiling
luminaire MPS large

