



Pergament Round LED surface-mounted ceiling luminaire large

Design

C. Meyer, M. Kocks, P. H. Neuhorst

PERGA-RA 420/4300/840 WS

Round luminaire element comprising an acrylic glass block with transparent superpolished exterior. Underneath painted matt to reduce glare. Luminaire element integrated in an outer steel powder-coated sectional aluminium cylindrical frame. The acrylic block is scratchproof and insensitive to fingerprints, and is connected to a powder-coated metal body by a bayonet and snap fastening. The metal body accommodates the electrical components and electronic ballast. The LED module is formed as a round LED flat board and can be removed for installation or exchange using a key-hole screw connection. Electrical connection of the flat LED board by means of a plug. Luminaire with heat-resistant wiring. Homogenous illumination of the light surface. Suitable for ceiling or wall mounting. Light colours 830 or 840. Also in a dimmable version. .



Protection rating IP20, safety class I.

Colour:

Metal body - similar to RAL 9016 white silk matt

Frame - white (WS), silver (SI), black (AQ)

Lamps	Ballast	Colour	Prod. code
1xLED-M 27 W	LED Driver	Similar to RAL 9016 white silk matt	SPP0000009
Luminaire luminous flux [lm]	Luminaire output [W]	Luminaire efficiency [lm/W]	
3188	31	102	

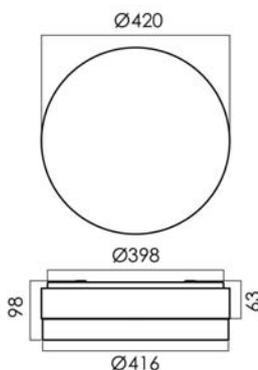

Dimens. [mm]			Weight [kg]	Photometric data		
H	D	Longitudinal UGR		Transverse UGR	LOR	
98	420	10,5	23.3	23.1	62.5 %	

Pergament Round LED surface-mounted ceiling luminaire large

